

Hydraulic Driven Gas Intensifier

MAXPRO
TECHNOLOGIES


- Maximum outlet pressure of 1,500 psig
- Single stage, double acting
- Oil free, non-lubricated gas pistons
- Simple design for ease of operation, ease of maintenance
- Minimum gas inlet pressure 100 psig
- 91 inch³ Displacement
- 100% duty rated
- Cooling jackets available
- Many control options are available
- 10 HP totally enclosed fan cooled motor, 460v 3Ø or 220 1Ø
- 24 VDC on/off solenoid for easy on/off control without shutting motor down
- Hydraulic oil cooling and filtration circuits with easy spin on filter
- Hydraulic pressure relief valves to prevent over-pressurization
- Oil level and temperature sensors
- Unit as pictured above is 36" deep, 44" wide and 50" tall



**Part number as shown:
MTHI1.5-10-PLC**

Connections:

- Gas Inlet and Gas Outlet ½" FNPT
- Coolant Inlet and Outlet ½" FNPT

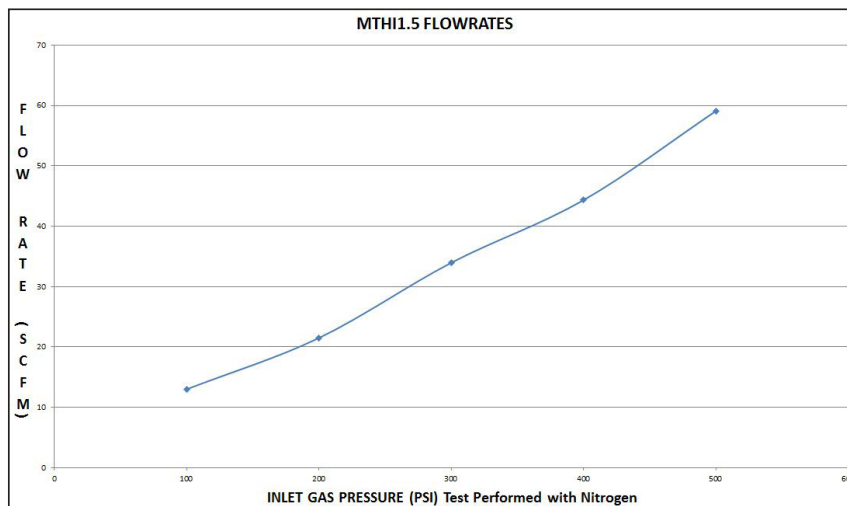

MAXPRO
TECHNOLOGIES

MAXPRO TECHNOLOGIES • 7728 Klier Drive South • Fairview, PA 16415 • USA

Phone 814-474-9191 • Fax 814-474-9391 • www.maxprotech.com MT 0717 R4